

Ultra-Low Temperature Heat Transfer Fluid

Process Applications

- Ultra-low temperature applications
- Pharmaceutical
- Process cooling & heating
- Cryogenic
- Refrigeration systems
- Freeze-drying/ Lyophilization

Dynalene MV Overview

Dynalene MV heat transfer fluid extends low-end operating ranges far beyond the boundaries of most competitive brands. Even at temperatures below -112°C (-170°F), the fluid remains pumpable.

Dynalene MV is a low-toxicity, environmentally-safer alternative to methylene chloride, trichloroethylene (TCE), and methanol/water mixtures. It also offers an alternative to silicone-based heat transfer fluids that is cost-effective and offers better thermo-physical properties.

Materials Compatibility

Polymer and Gasket Compatibility:

- Acetal
- Aramid Fiber
- Chemraz (FFKM)
- Epoxy
- Fluorocarbon (FILM)
- Fluoroelastomer
- Glass Fiber
- Gylon
- Kalrez
- Kel-F (CTFE)
- Peek
- PTFE
- Teflon (All)
- PTFE-Silicone
- PTFE-Viton
- PTFE-Fiberglass
- Viton
- Resin-Graphite

Metal Compatibility:

- Aluminum
- Brass
- Bronze (All)
- Carbon Steel
- Copper
- Copper-Nickel
- Monel
- Nickel
- Stainless Steel (All)
- Stainless Steel Clad
- Tantalum
- Titanium

Dynalene's Fluid Care Program

Coupling our Dynalene fluids with a fluid care program can extend the life of your systems significantly. We offer yearly testing of the heat transfer fluid in your system and can track changes in the fluid year-to-year so adjustments can be made to keep your system working at its best.

Recommended Temperature Range for Closed Systems:

-112°C (-170°F) to 163°C (325°F)

(Dynalene MV is recommended for closed systems only)

Properties of Dynalene MV

A comprehensive list of all thermo-physical properties of Dynalene MV can be found on pages 2-3. For health and safety information or to request a Safety Data Sheet, contact our Dynalene sales representatives.

Composition:	Hydrocarbon blend
Appearance:	Clear, light yellow
Odor:	Mild orange odor
Freezing Point:	$< -129^{\circ}\text{C}$ ($< -200^{\circ}\text{F}$)
Boiling Point:	176°C (348°F)
Flash Point (Closed):	53°C (127°F)
Flash Point (Open):	61°C (142°F)
Fire Point:	64°C (147°F)
Autoignition Temp:	388°C (730°F)
Critical Temp:	387°C (729°F)
Critical Pressure:	34 bar (33.6 atm)
Molecular Wt	135
Dielectric Constant	2.3

Benefits of Choosing Dynalene MV


- Low viscosity
- Available worldwide
- Cost-effective
- Total fluid care option
- Proven performance
- Thermal stability
- Biodegradable
- Environmentally safer

Quantity & Availability

Dynalene MV is offered in 1, 5 and 55-gallon containers. Pricing depends on quantity, and Dynalene, Inc. will work with you to try and fit your budget.


US Units

Temp °F	Viscosity cP	Thermal Cond. BTU/hr·ft·°F	Specific Heat BTU/lb·°F	Density lb/ft ³
-170	218	0.095	0.318	59.2
-160	97.1	0.094	0.322	58.9
-140	30.3	0.093	0.332	58.4
-120	13.7	0.091	0.341	57.8
-100	7.64	0.090	0.350	57.3
-80	4.92	0.088	0.360	56.8
-60	3.47	0.087	0.369	56.2
-40	2.62	0.085	0.379	55.7
-20	2.08	0.084	0.388	55.2
0	1.72	0.082	0.397	54.6
20	1.46	0.081	0.407	54.1
40	1.26	0.079	0.416	53.5
60	1.12	0.078	0.425	53.0
80	1.00	0.076	0.435	52.5
100	0.91	0.074	0.444	51.9
120	0.84	0.073	0.453	51.4
140	0.77	0.071	0.463	50.9
160	0.72	0.070	0.472	50.3
180	0.68	0.068	0.482	49.8
200	0.64	0.067	0.491	49.3
220	0.61	0.065	0.500	48.7
240	0.58	0.064	0.510	48.2
260	0.56	0.062	0.519	47.6
280	0.53	0.061	0.528	47.1
300	0.51	0.059	0.538	46.6
320	0.5	0.058	0.547	46.0
325	0.49	0.057	0.549	45.9

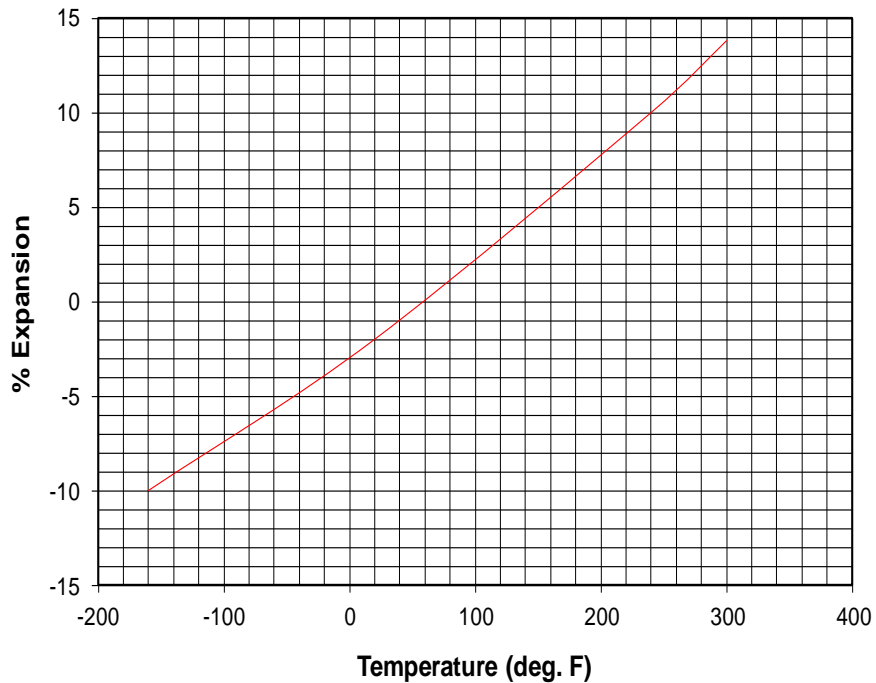

SI Units

Temp °C	Viscosity mPa·s	Viscosity cSt	Thermal Cond. W/m·K	Specific Heat kJ/kg·K	Density kg/m ³
-112	215.3	227.1	0.165	1.330	948
-100	46.4	49.5	0.162	1.373	938
-90	19.9	21.4	0.159	1.408	931
-80	10.7	11.6	0.157	1.443	923
-70	6.66	7.28	0.155	1.479	915
-60	4.58	5.05	0.152	1.514	907
-50	3.38	3.76	0.150	1.549	900
-40	2.63	2.95	0.148	1.584	892
-30	2.13	2.41	0.145	1.620	884
-20	1.78	2.03	0.143	1.655	876
-10	1.53	1.76	0.140	1.690	869
0	1.34	1.56	0.138	1.726	861
10	1.19	1.40	0.136	1.761	853
20	1.07	1.27	0.133	1.796	845
30	0.97	1.16	0.131	1.831	838
40	0.90	1.08	0.128	1.867	830
50	0.83	1.01	0.126	1.902	822
60	0.78	0.96	0.124	1.937	815
70	0.73	0.90	0.121	1.973	807
80	0.69	0.86	0.119	2.008	799
90	0.65	0.82	0.117	2.043	791
100	0.62	0.79	0.114	2.078	784
110	0.59	0.76	0.112	2.114	776
120	0.57	0.74	0.109	2.149	768
130	0.55	0.72	0.107	2.184	760
140	0.53	0.70	0.105	2.219	753
150	0.51	0.68	0.102	2.255	745
163	0.49	0.67	0.099	2.301	735

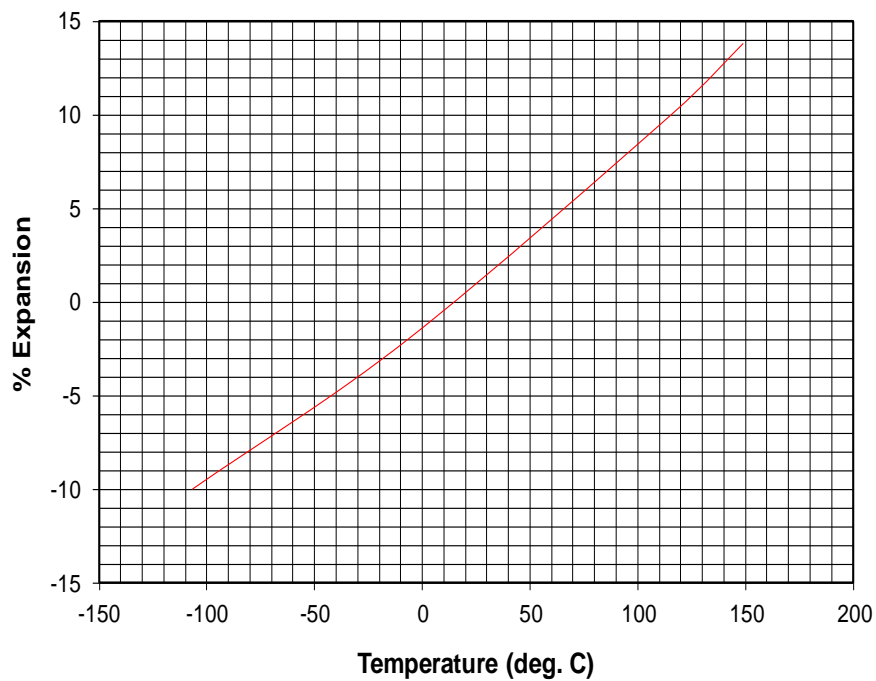

Product Disclaimer

The information contained in this entire publication is presented in good faith at “no charge” and is believed to be correct as of the date indicated. No representations or warranties are made as to its completeness or accuracy. The information listed is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will the seller be responsible for damages of any nature whatsoever resulting from the use of, or reliance upon, this information or the product to which this information refers. Nothing contained on this page is to be construed as a recommendation to use the product, process, equipment or formulation in conflict with any patent. No representation or warranty, expressed or implied, is made that the use of this product will not infringe any patent.

No representations or warranties, either expressed or implies, of merchantability, fitness for a particular purpose or for any other nature are made with respect to the information, or the product to which the information refers.

Contact Information

Corporate Headquarters

Dynalene, Inc.
5250 West Coplay Road
Whitehall, Pennsylvania 18052
Phone: 610-262-9686 / 1-877-244-5525
Fax: 610-262-7437
Email: info@dynalene.com
Website: www.dynalene.com

Midwest Location

248 Beinoris Dr
Wood Dale, IL 60191
Phone: 1-855-216-7639
Email: centralsales@dynalene.com

West Location

1701 S 5350 W
Salt Lake City, UT 84104
Phone: 1-877-244-5525
Email: westsales@dynalene.com